

ids



EQUIDAE

TECHNICAL FLOORING
FOR HORSE COMFORT



MATTRESSES AND TECHNICAL FLOORING FOR HORSE COMFORT

For more than 25 years, IDS has specialized in rubber flooring.

We have been able to develop various products for the agricultural sector and have acquired extensive experience in the industrial and construction sectors.

Products adapted to every use

The health and performance of horses depend on optimal relaxation, training and transport conditions. Use of professional flooring meets these increasingly stringent requirements. They significantly improve the well-being, safety and performance of the animal, reduce the risk of injury, limit veterinary costs and daily cleaning work in the stables.

Quality products

Mats being subject to great constraints during their use, IDS is committed to providing you with quality products, tested and guaranteed.

Installation instructions are provided with the delivery notes. They are also available for download on our website or on request from our sales department.

These instructions must be observed for any installation.

OUR COMMITMENTS



Ecovadis Silver Medal

Our CSR policy and commitments have been rewarded with the ecovadis silver medal. We are proud of this recognition but we do not intend to stop there! Many projects and actions are underway to reduce our environmental impact and work for a more responsible market.

ISO 9001:2015

BUREAU VERITAS
Certification



ISO 9001 certified.

Management reiterates its commitment to implement the necessary resources to continue to improve client satisfaction and the competitiveness of the company, whilst ensuring the respect of safety of each person and the environment. Our company works with certification or standardization bodies (such as LNE, IANESCO, VERITAS, etc.).



AMFORI member,

ID Group is committed to respecting social principles, and the principles of open and sustainable commercial exchanges (respect for the labour code, business ethics, non-use of child labour, non-discrimination, protection of the environment ,...)
For more information, see www.amfori.org



REACH REGULATION

In order to preserve your health and that of your horses, IDS is committed to respecting the REACH regulations in force by banning from its products substances that are harmful or cause concern for health or the environment.


RUBBER

IDS products are made of rubber.

This natural material is produced from the latex secreted by the rubber tree.

Natural rubber :

Natural rubber is the product resulting directly from the transformation of latex. It is very resistant to abrasion and remains flexible even in the event of frost or prolonged exposure to U.V.

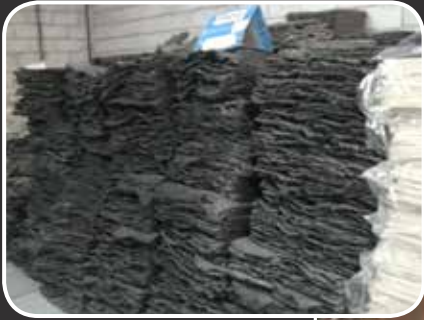


Harvesting rubber tree latex



BEST RAW MATERIALS

IDS selects the finest materials such as natural rubber to produce compounds specially designed for use in the equine environment.

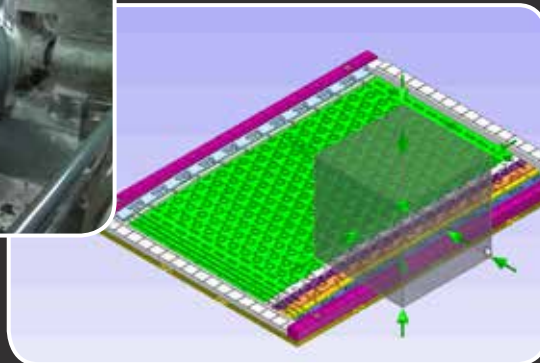

RESEARCH AND DEVELOPMENT

IDS molds are modeled in 3 dimensions. ID GROUP's Research and Development department works constantly to develop new products.



PRODUCTION

From recipe formulation to finishing, including extrusion, molding and calendering, IDS masters all rubber transformation processes thanks to high-performance production lines.

SOCIAL MEDIAS

Discover the latest news and our new products on our social medias and on our website www.ids-agri.com



WWW.IDS-AGRI.COM



IDS EQUIDÉS



ID GROUP



NATURA MATTRESS

**ULTRA COMFORTABLE BOX MATTRESS
THANKS TO ITS 100% NATURAL LATEX
FOAM**

The Natura mattress provides optimal sleeping comfort, muscle and tendon rest and good blood circulation without pressure points, as well as excellent thermal insulation. It also guarantees better hygiene thanks to faster floor drying thanks to the runoff of urine on the rubber, thus ensuring good health of the horse.

**WARRANTY
5
YEARS**

COMPOSITION
INSTALLATION
CLEANING

100% natural latex foam.
Thickness : 40 mm
Density: 300 kg/m³

Non-slip rubber sheet preventing slipping when lying down or lifting, with a textile insert for more resistance.

The sealed latex foams are covered by a rubber sheet fixed along the walls by profiles.

Installation is made to the exact box dimensions.

After clearing straw, the mattress can be cleaned with a water jet or a high-pressure cleaner. Then add a thin layer of straw.



Aluminum profile



Latex foam

Reference	Dimensions	Thickness	Weight
Natura	Custom made	43 mm	Rubber sheet: 4 kg/m ² Latex foam: 300 kg/m ³



PADDOCK

NON-SLIP RUBBER SLABS FOR BOX

Thanks to their studs on the underside, Paddock slabs provide excellent bedding comfort as well as perfect flexibility to relieve the joints of horses in their boxes.

COMPOSITION

100% natural rubber.
Thickness: 30mm.
Non-slip hammered surface.
Shock-absorbing studded sole.

Excellent resistance.


INSTALLATION

Slabs interlock with each other thanks to a lip system which ensures the hold and the sealing of the slabs. Installation is made to the exact box dimensions.


CLEANING

After clearing straw, the slabs can be cleaned with a water jet or a high-pressure cleaner.


Then add a thin layer of straw.

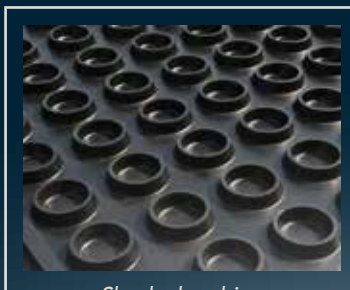

Shock-absorbing
pads under the mat

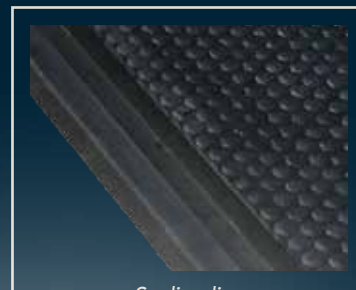

Sealing lips

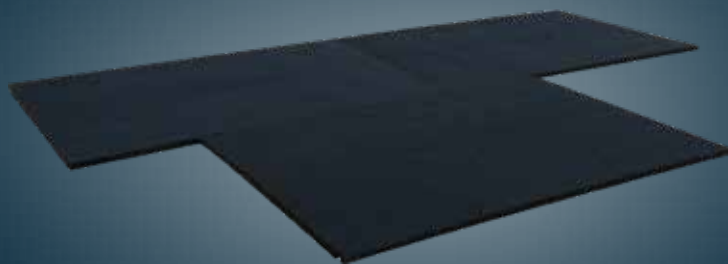


Reference	Width	Length	Thickness	Weight
Paddock	75 cm	100 cm	30 mm	18,5 kg



CLIP HORSE

INTERLOCKING RUBBER SLABS FOR BOXES AND WALKWAYS

Non-slip rubber tiles easy to fit together thanks to their puzzle joints. Ideal for stalls, walkways and grooming areas.

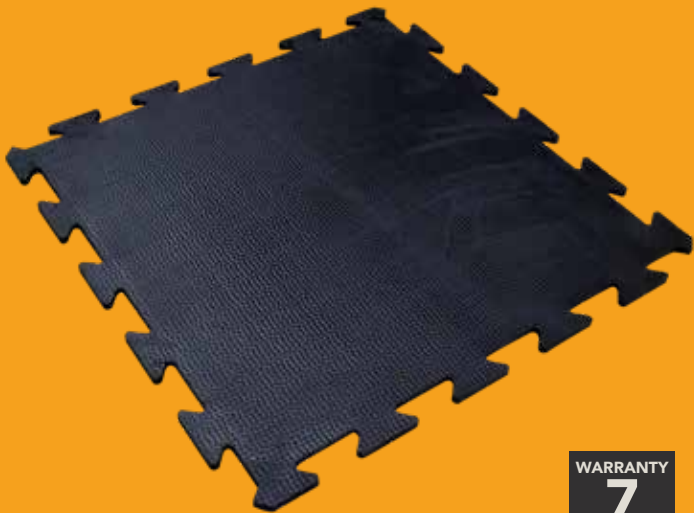


WARRANTY
7
YEARS

COMPOSITION
INSTALLATION
CLEANING

- 100% natural rubber.
- Thickness: 17mm.
- Non-slip hammered surface.
- Grooved underside to facilitate drainage.
- Quick and easy installation thanks to the puzzle joints, the slabs fit together.
- Slabs are self-weighted, it is not necessary to fix them to the ground, which allows them to be cleaned easily.
- Tiles can be cleaned with a water jet or a high-pressure cleaner.
- Then add a thin layer of straw.



Hammered
top face

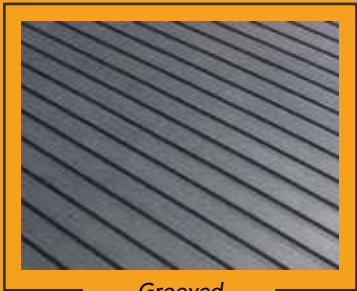

Grooved
underside

Reference	Width	Length	Thickness	Weight
Clip Horse	1 m	1 m	17 mm	23 kg

Non-contractual photo.

Weights and dimensions are given as an indication - Products tolerance +/- 5%

EVA PROTECT

WALL PROTECTION MADE OF EVA FOAM

Preserve your horse's joints and your box walls thanks to the damping power of EVA foam.

COMPOSITION INSTALLATION CLEANING

EVA foam.
Thickness: 15mm.
Density: 40 kg/m³

Flexible and light to adapt to walls of boxes and trucks.

Quick and easy installation.
Fix the wall protections using hinge screws on the edges and using a finishing aluminum profile on the top.

Easy to cut.

Wall protections can be cleaned with a water jet.



Granulated surface and aluminum profile


Reference	Width	Length	Thickness	Weight
EVA Protect	120 cm	185 cm	15 mm	3,7 kg/m ²



CLASSIC

NON-SLIP MAT FOR WALKWAYS AND GROOMING AREAS


Non-slip rubber mat to prevent falls in the aisles and to preserve horses joints.

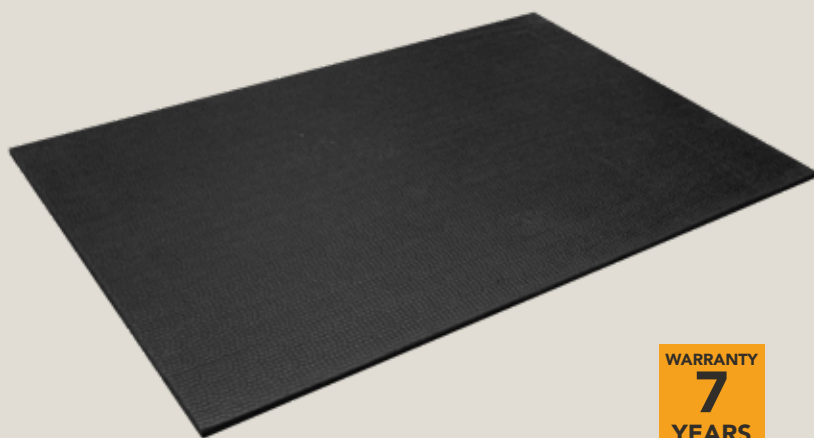

WARRANTY
7
YEARS



Hammered top surface

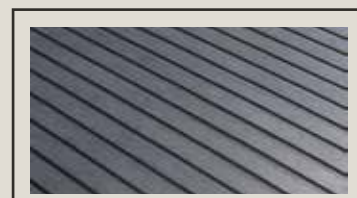

Grooved underside

Reference	Width	Length	Thickness	Weight
Classic	1,00 m	1,50 - 1,65 - 1,75 1,85 - 2,00 - 2,20 m	17 mm	23 kg/m ²
	1,10 m			
	1,20 m			
	1,25 m			

COMPOSITION
INSTALLATION
CLEANING

100% natural rubber.
Thickness: 17mm.
Non-slip hammered surface.

Grooved underside to facilitate drainage.

Rubber mats are installed edge to edge in the aisles.

Secure the mats in the corners using 8x80mm hammer-in anchors with A2 stainless steel screws and washers.

Classic mats can be cleaned with a water jet or high-pressure cleaner.

AISLES



IDS 10T / 12T / 16T

RUBBER FLOORING FOR WALKWAYS

Non-slip rubber flooring rolls for walkways and grooming areas.

COMPOSITION INSTALLATION CLEANING

100% natural rubber.
Textile insert for more resistance.
Flexible with a non-slip hammered surface limiting the risk of falling, and protecting the joints of horses.


In a roll for quick and easy installation in aisles.

Fix the rolls on the side using 6.5x70mm stainless steel nails.

Custom made dimensions on request.

IDS flooring can be cleaned with a water jet or high-pressure cleaner.

WARRANTY
7
YEARS

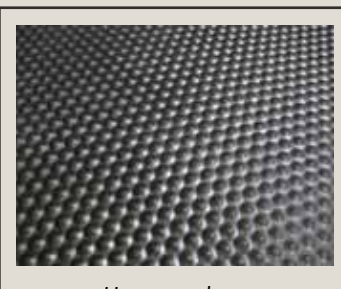

Hammered top surface



IDS 10 T
Fabric imprint underside



IDS 12T - 16T
Smooth upperside

References	Max Width	Max Length	Thickness	Weight
IDS 10T	1,80 - 2,00 2,40 - 3,00 m	50 m	10 mm	12,0 kg/m ²
IDS 12T	2 m	50 m	12 mm	13,9 kg/m ²
IDS 16T	2 m	50 m	16 mm	21,2 kg/m ²

SHOWER



RUBBER GRATINGS

DRAINING RUBBER GRATINGS FOR HORSE SHOWERS

Non-slip and draining, natural rubber gratings make it possible to secure horse showering areas while ensuring rapid water drainage.

WARRANTY
7
YEARS

COMPOSITION

100% natural rubber gratings ultra resistant to abrasion, frost and U.V.


The cells allow water to drain quickly.

SÉCURITÉ


Very non-slip even when wet, natural rubber gratings reduce the risk of falls and therefore the stress of horses.

CLEANING


Rubber gratings are resistant to most cleaning products and can be cleaned with a water jet or high-pressure cleaner.

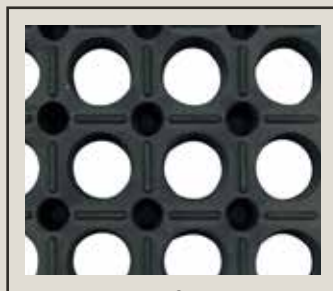

M25
Upper surface

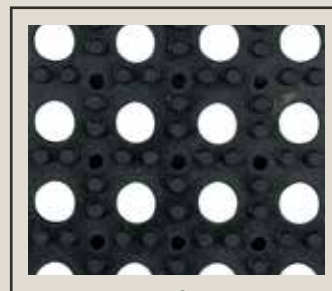

M25
Underside

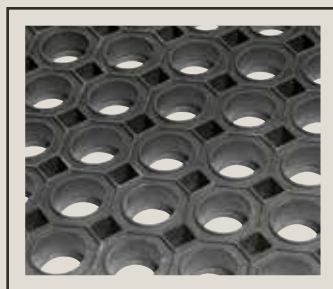

M69
Upper surface



M69+
Upper surface

References	Dimensions	Thickness	Weight
M25	100 x 150 cm	22 mm	14,5 kg/mat
M69 +	100 x 150 cm	23 mm	18,0 kg/mat
M69	100 x 150 cm	23 mm	18,0 kg/mat

Non-contractual photo.

Weights and dimensions are given as an indication - Products tolerance +/- 5%



SHOWER



CLIP SUPER

NON-SLIP RUBBER SLABS FOR HORSE SHOWERS

Very non-slip thanks to their diamond-shaped upper surface, Clip Super interlocking slabs are ideal for shower floors. They reduce the risk of falling and evacuate water.

COMPOSITION

100% natural rubber.
Thickness: 17mm.
Non-slip diamond surface.
Grooved underside to evacuate water.


Excellent resistance to abrasion, frost, and U.V.

INSTALLATION


Easy and quick to install.
The slabs fit together using a puzzle system.
No need to glue them to the ground.

CLEANING


Clip Super slabs are resistant to most cleaning products and can be cleaned with a water jet or high-pressure cleaner.

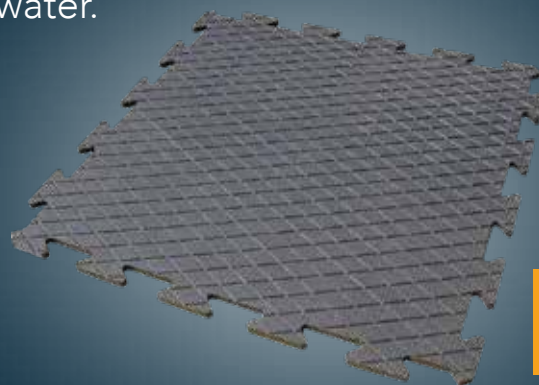

WARRANTY
7
YEARS

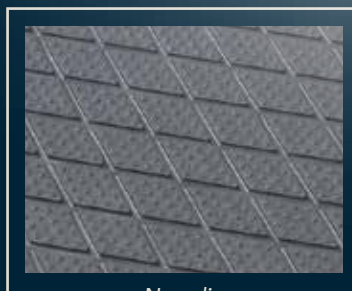

Non-slip
upper surface

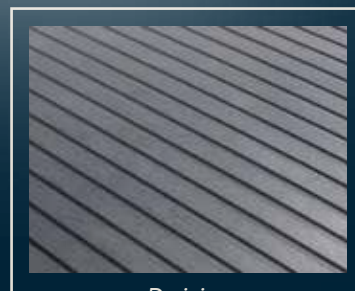

Draining
underside

Reference	Dimensions	Thickness	Weight
Clip Super	100 x 100 cm	17 mm	21 kg/m ²

VANS & TRUCKS





IDS RAMP & COCO

NON-SLIP FLOORING FOR VAN AND TRUCK DECKS

Specially designed to facilitate the loading of horses into trailers and trucks.

WARRANTY
5
YEARS

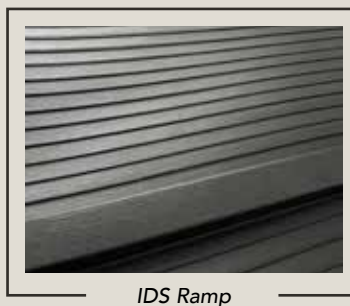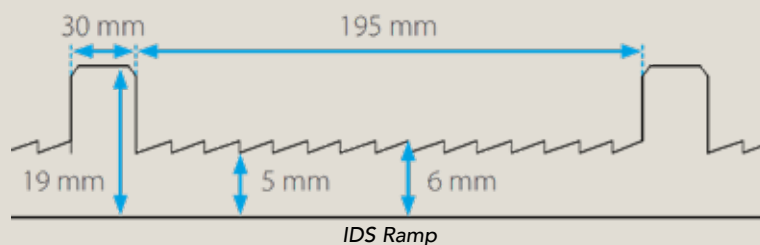

IDS Ramp



Natural coir

COMPOSITION

IDS Ramp:
100% natural rubber.
Allows maximum grip on slopes.

Coco:
Natural coconut fibers on PVC sole.

INSTALLATION

The flooring is screwed or glued to the vehicle deck.

Custom made cut on demand for perfect adaptation to the length and width of the ramp.

CLEANING

IDS Ramp can be cleaned with a water jet or high-pressure cleaner.

It is resistant to most cleaning products.

References	Width	Length	Thickness	Weight
IDS RAMP	1,80 m	Up to 30 m	5 - 19 mm	8,5 kg/m ²
IDS RAMP	2,40 m	Up to 30 m	5 - 19 mm	8,5 kg/m ²
COCO17MM	2,00 m	Up to 30 m	17 mm	6,3 kg/m ²
COCO23MM	2,00 m	Up to 30 m	23 mm	7,3 kg/m ²

VANS & TRUCKS



ID MAT 6

DECK COVERING FOR TRANSPORT VEHICLES

Lightweight and sturdy, ID Mat 6 rubber flooring is ideal for the decks of horse trailers and horse trucks.

COMPOSITION

100% natural rubber.
Thickness: 6mm.

Rubber flooring with textile insert for more resistance.
Non-slip, it allows a safer loading of horses.

INSTALLATION

The ID Mat 6 flooring is attached to the edges of the loading ramp using stainless steel screws.

Custom made dimensions available on request.

CLEANING


It can be cleaned with a water jet or a high-pressure cleaner.

It is resistant to most cleaning products.



Textile insert

WARRANTY
5
YEARS

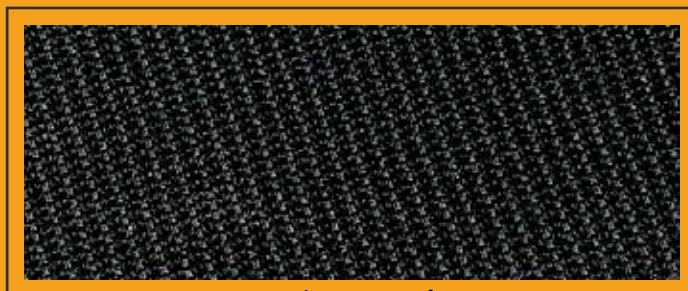

Non-slip upper surface

Reference	Width	Length	Thickness	Weight
ID Mat 6	1,50 m	Custom made	6 mm	5,4 kg/m ²




IDS 10 TOILÉ

RUBBER FLOORING FOR VANS AND TRUCKS

Non-slip rubber flooring for transporting horses in vans and trucks. Robust and durable, it reduces the risk of falls and stress on horses.

WARRANTY
5
YEARS

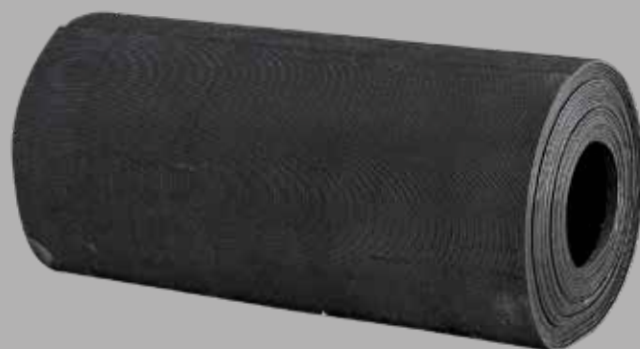

COMPOSITION INSTALLATION CLEANING

100% natural rubber.
Textile insert for more resistance.


Flexible with a non-slip hammered surface limiting the risk of falling, and protecting the horses joints.

In rolls for quick and easy installation in vehicles.


Fix the rolls on the edges using 6.5x70mm stainless steel nails.

Custom sizes on request.

The IDS 10 floor covering can be cleaned with a water jet or a high-pressure cleaner.



Hammered upper
surface

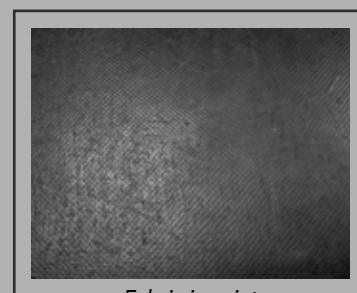

Fabric imprint
underside

Reference	Width	Length	Thickness	Weight
IDS 10T	1,80 - 2,00 2,40 - 3,00 m	Custom made max 50 m	10 mm	12 kg/m ²



EVA PROTECT

EVA FOAM WALL PROTECTION FOR VANS AND TRUCKS

Thanks to its high-quality EVA foam, the wall protection ensures a high level of safety for your horses during transport.

They gently absorb blows in order to preserve their joints and protect the walls of your vehicles.

COMPOSITION INSTALLATION CLEANING


EVA foam.
Thickness: 15mm.
Density: 40 kg/m³

Flexible and light to adapt to the walls of vans and trucks.

Quick and easy installation.
Fix the wall protections using hinge screws on the edges and using a finishing aluminum profile on top.

Easy to cut.

The wall protections can be cleaned with a water jet.

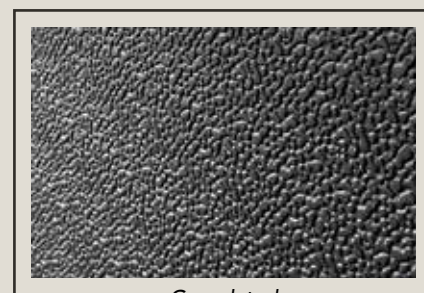

Granulated
surface

Reference	Width	Length	Thickness	Weight
EVA Protect	120 cm	185 cm	15 mm	3,7 kg/m ²

WALKER



WALKER GRATING

RUBBER GRATING FOR STABILIZING HORSE WALKERS

WARRANTY
5
YEARS

Prevent ruts from forming in your walker with heavy duty rubber gratings.

COMPOSITION INSTALLATION CLEANING

100% natural rubber gratings.



Ultra resistant to abrasion, frost and U.V.

The cells stabilize the walker's floor.

Laid flat on the ground, the rubber gratings are then covered with sand.

Gratings can be joined together using C69 joints.

By stabilizing the sand inside the walker, the rubber gratings prevent the formation of ruts and thus reduce the time needed to level the floor of the walkers.

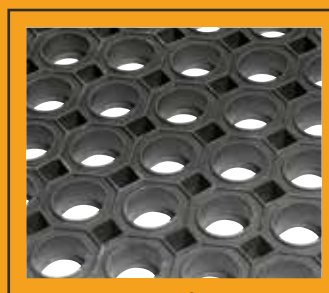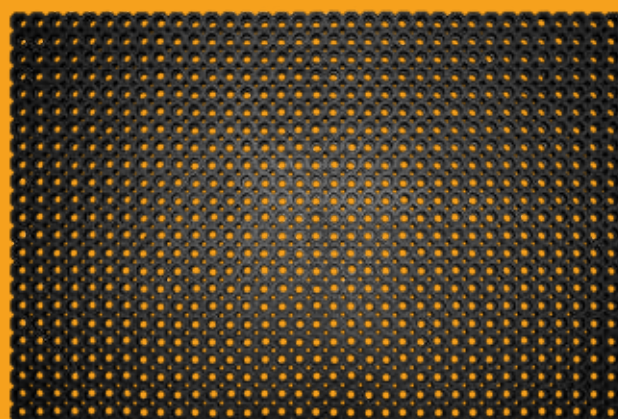

M69
Upper surface



C69 junction

Reference	Dimensions	Thickness	Weight
M69	100 x 150 cm	23 mm	18,0 kg

WALKER



ID WALKER

RUBBER FLOORING FOR HORSE WALKERS

Custom made rubber flooring for horse walkers.
The flexibility of the rubber helps to absorb shocks, thus preserving the joints of the horses.

COMPOSITION

100% natural rubber.
Thickness: 17mm.
Non-slip surface.
Grooved underside to evacuate water.

Excellent resistance to abrasion, frost and U.V.

INSTALLATION

The tiles are cut to size to perfectly fit the radius of your walker.
Fix the slabs in the corners using 8x80mm hammer-in anchors and A2 stainless steel washers.


CLEANING

ID Walker tiles protect floors from premature wear and avoid the need to level the floor on a regular basis.


The tiles can be cleaned with a water jet or a high-pressure cleaner.



WARRANTY
5
YEARS

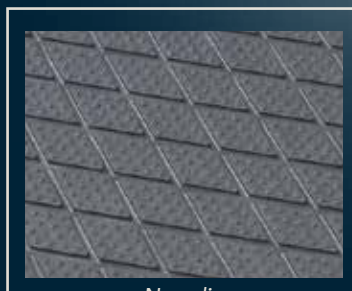

Non-slip
upper surface

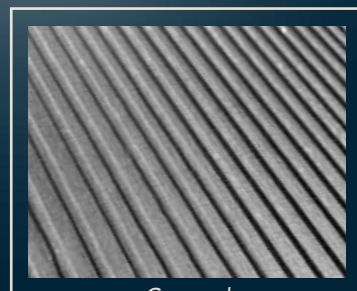

Grooved
underside

Reference	Dimensions	Thickness	Weight
ID Walker	Custom made	17 mm	19 Kg/m ²



IDS GREEN

SOIL STABILIZATION SLABS

Soil stabilization slabs and outdoor paths.
Avoids the formation of ruts caused by the passage of horses and vehicles.



COMPOSITION
INSTALLATION
CLEANING

- Polyethylene slab.
Thickness: 40mm.
- Resists the passage of machines up to 350 T/m².
- The stabilization grids easily fit together.
- Then fill with the substrate of your choice (gravel, soil, sand, etc.)
- Great resistance to bad weather, fire, frost and U.V.
- Does not require any special cleaning.



Interlocking

Reference	Width	Length	Thickness	Weight
IDS GREEN	50cm	50 cm	40 mm	5,6 kg/m ²

MISCELLANEOUS



DOOR CURTAIN

CLEAR PVC STRIP DOOR CURTAIN

Flexible PVC strips door allowing horses to come and go while avoiding drafts.


STAINLESS STEEL PROFILE

Length = 1m
Number of hooks = 24
ø anchor holes = 6.2 mm

FIXING PLATE

Height = 45mm
Hole spacing = 82 mm
ø holes = 5 mm
200 Plate = 3 fixing holes
300 Plate = 4 fixing holes
400 Plate = 5 fixing holes

ROLL LENGTH:
25 M OR 50 M

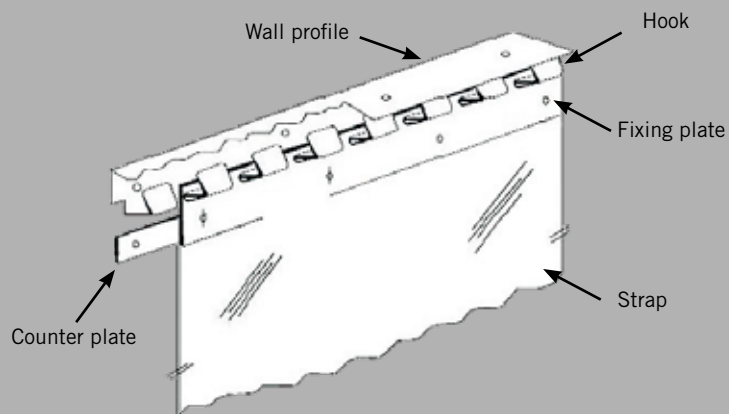

Reference	Designation	Dimensions
LAN200	200 Strap	200 x 2 mm
LAN300	300 Strap	300 x 3 mm
LAN400	400 Strap	400 x 2 mm
LANPROFILMUR	Wall profile	1000 mm
LANPLAQUE200	Fixing plate	200 mm
LANPLAQUE300	Fixing plate	300 mm
LANPLAQUE400	Fixing plate	400 mm

The strap supports are delivered without screws



RELAX GRAT

RUBBER SCRATCHER

Allows your horses to scratch without risk of injury.
It also protects your installations from damage

COMPOSITION
EASY INSTALLATION
CLEANING

- Natural rubber.
- Reinforcement at the corner of the wall to avoid the risk of injury.
- Easy and quick to install.
- Fix the scratcher on a post or on a corner of the wall with the profiles and A2 stainless steel screws and washers.
- The Relax Grat can be cleaned with a water jet or high-pressure cleaner.



Rubber scraper pads

Reference	Dimensions	Thickness	Weight
Relax Grat	61 x 122 cm	17 mm	12,3 kg

MISCELLANEOUS




PROTECTOR

RUBBER WALL CORNER PROTECTION

Avoid the risk of injury to your horses on the projecting corners of concrete walls and pillars.

COMPOSITION
EASY INSTALLATION
CLEANING

- Natural rubber.
- Reinforcement at the corner of the wall to avoid the risk of injury.
- Easy and quick to install.
- Secure the corner protection with A2 stainless steel screws and washers.
- The corner protectors can be cleaned with a water jet or a high-pressure cleaner.

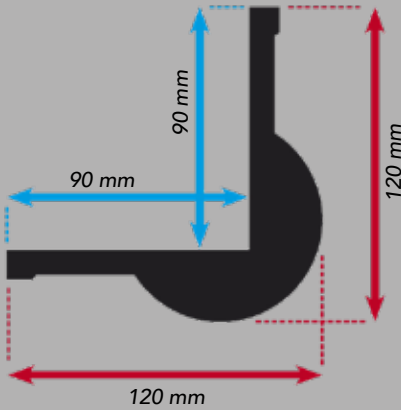

Reference	Width	Length	Weight
Protector	120 x 120 mm	900 mm	3 kg



FENCE'S COVER

RUBBER DROP CLOTH FOR BARRIERS

Protective coating made of ultra-resistant rubber for securing barn fences.
Your horses will no longer pass a plumb between the tubes.
Ultra light so as not to force on the hinges.

COMPOSITION INSTALLATION CLEANING

Natural rubber reinforced with a textile insertion for more tear resistance.

Thickness: 3 mm or 6 mm.
Light and robust.

On wooden fences:
The rubber sheet is screwed directly onto the fence with stainless steel screws and washers.

On metal fences:
The rubber sheet is fixed using zip ties.

Fence protections can be cleaned with a water jet or a high-pressure cleaner.



Textile insert



Reference	Width	Length	Thickness	Weight
IDS Sheet	1,40 m / 1,60 m	Custom made	3 mm	4 kg/m ²
CCO2FL6IT	1,50m / 2,00 m	Custom made	6 mm	8,8 kg/m ²



SWING

BREATHABLE AND NON-SLIP
SADDLE PAD


Allows the saddle to stay in place while ensuring air circulation between the saddle and the horse’s skin.

COMPOSITION
INSTALLATION
CLEANING



Expanded vinyl foam on polyester weft.
The open weave allows air to circulate under the saddle.

Available in rolls, the Swing saddle pad is easily cut to the size of the saddle.

Machine washable at 30°C

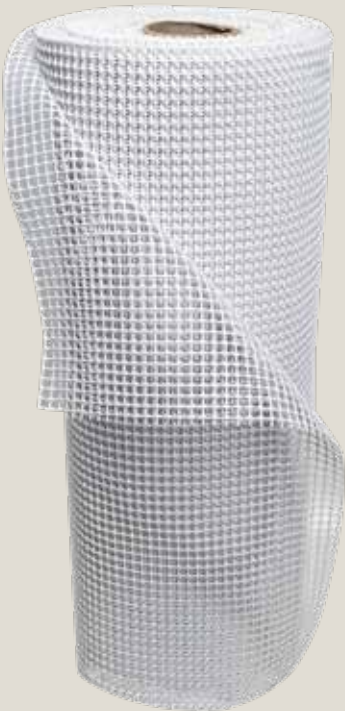

Reference	Width	Length	Thickness	Weight
Swing	0,60 m	Up to 30 m	3 mm	0,2 kg/m²

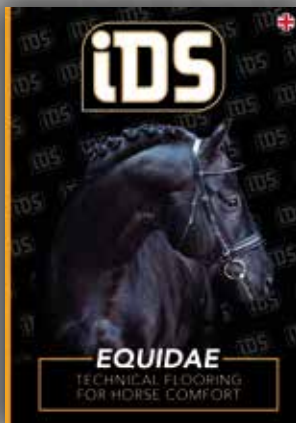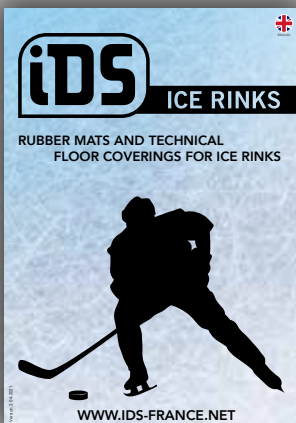

Industrie Développement Services
47 voie St Exupéry - Alpespace
73 800 Porte de Savoie - France

Tél : +33 479 843 606
Fax : +33 479 843 610

contact@ids-agri.com



WWW.IDS-AGRI.COM



GROUP

Like us
on



IDS Equidés